1915 • • • 40th ANNIVERSARY • • • 1955

NACA

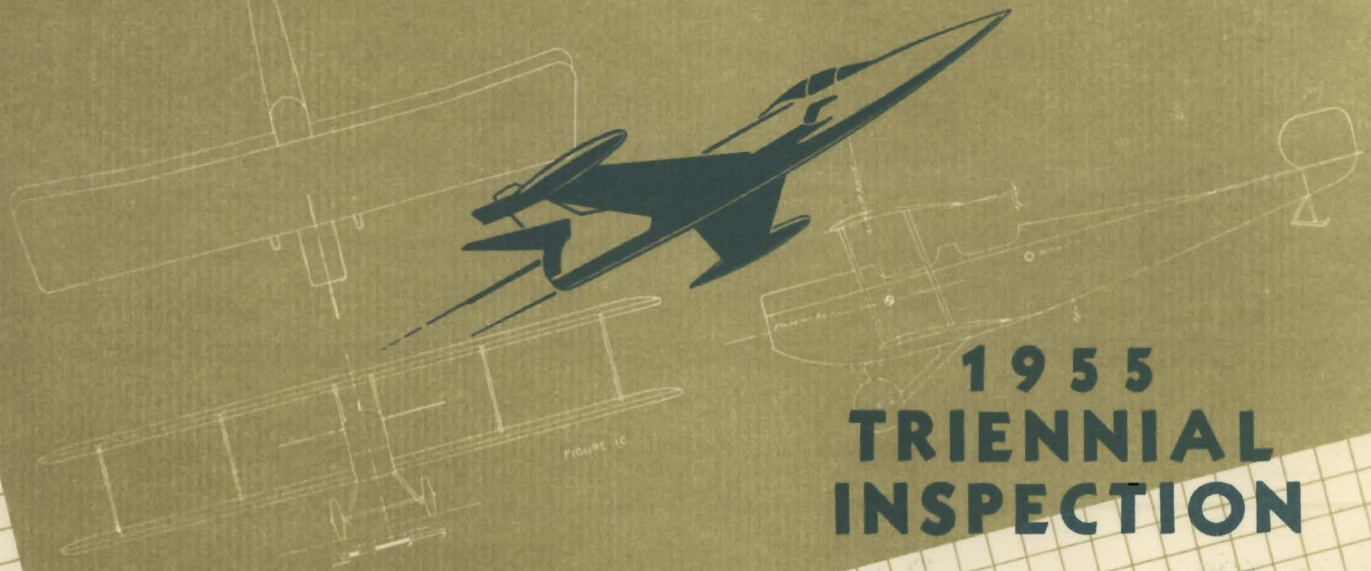

1955 TRIENNIAL INSPECTION

AMES AERONAUTICAL LABORATORY

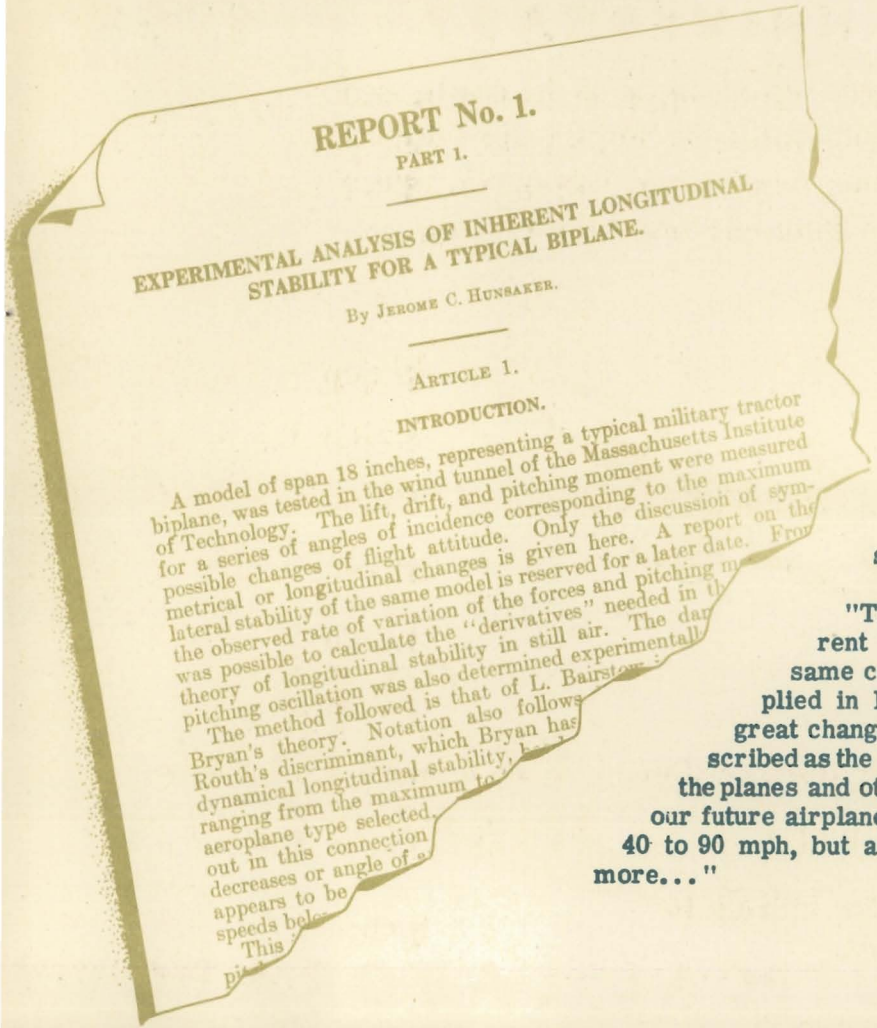

REPORT No. 1.

PART 1.

EXPERIMENTAL ANALYSIS OF INHERENT LONGITUDINAL STABILITY FOR A TYPICAL BIPLANE.

By Jerome C. Hunsaker.

Article 1.

INTRODUCTION.

A model of span 18 inches, representing a typical military tractor biplane, was tested in the wind tunnel of the Massachusetts Institute of Technology. The lift, drift, and pitching moment were measured for a series of angles of incidence corresponding to the maximum possible changes of flight attitude. Only the discussion of symmetrical or longitudinal changes is given here. A report on the lateral stability of the same model is reserved for a later date. From the observed rate of variation of the forces and pitching moments it was possible to calculate the "derivatives" needed in the theory of longitudinal stability in still air. The damping of pitching oscillation was also determined experimentally.

The method followed is that of L. Bairstow; Bryan's theory. Notation also follows Routh's discriminant, which Bryan has dynamical longitudinal stability, ranging from the maximum to aeroplane type selected. out in this connection decreases or angle of appears to be speeds bel This

THE COVER

"Many of the major problems of the aircraft of the future are old problems in new dress.

"The first technical report of the National Advisory Committee for Aeronautics, written in 1915 by Dr. J. C. Hunsaker, present NACA Chairman, dealt with the problem of the stability of an airplane in free flight.

"The then current high-speed military airplane was the Curtiss J N2 with a maximum speed of about 85 mph and a minimum speed of about 43 mph.

"The problems of stability and control of current and future aircraft are describable in the same conceptual framework...which Hunsaker applied in NACA Report No. 1. There are, however, great changes in the superstructure, in what Bryan described as the approximations to the air pressures to which the planes and other parts of the machine are subjected. For our future airplanes we must assure stability not at speeds of 40 to 90 mph, but at speeds extending from 100 to 1000 mph or more..."

H. L. Dryden, January 7, 1955

This booklet contains reproductions of the charts used to illustrate the presentations at the NACA'S 1955 Triennial Inspection at the Ames Aeronautical Laboratory. Space has been provided for those who wish to take notes.

STATIC STABILITY	Section 1
DYNAMIC STABILITY	Section 2
SIMULATORS AS AN AID TO FLIGHT RESEARCH	Section 3
AIRPLANE FLEXIBILITY	Section 4
TRANSONIC RESEARCH	Section 5
HYPERSONIC RESEARCH	Section 6
RESEARCH ON TAKE-OFF AND LANDING	Section 7
UNITARY PLAN WIND TUNNELS	Section 8
JET AIRCRAFT CRASH-FIRE RESEARCH CRASH IMPACT SURVIVAL	Section 9

LIFTING WING
PRODUCES VORTEXES

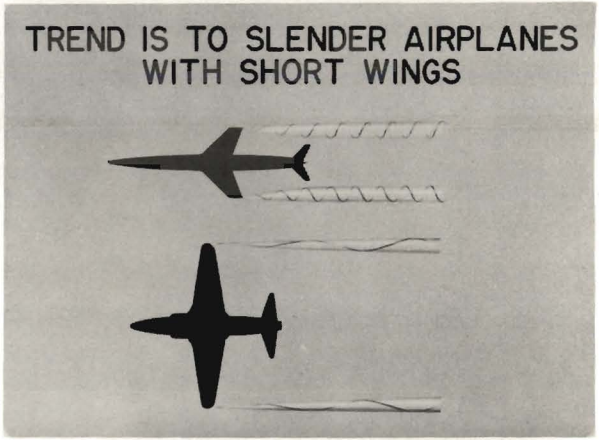
TREND IS TO SLENDER AIRPLANES
WITH SHORT WINGS

FUSELAGE ALSO PRODUCES VORTEXES



FUSELAGE VORTEX INFLUENCES STABILITY IN YAW





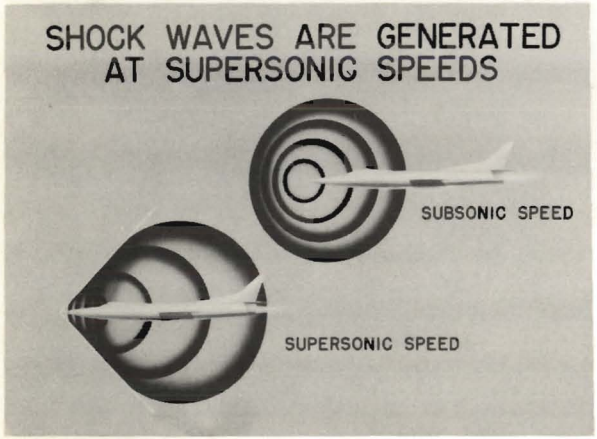
SHOCK WAVES ARE GENERATED
AT SUPERSONIC SPEEDS
SUBSONIC SPEED
SUPERSONIC SPEED

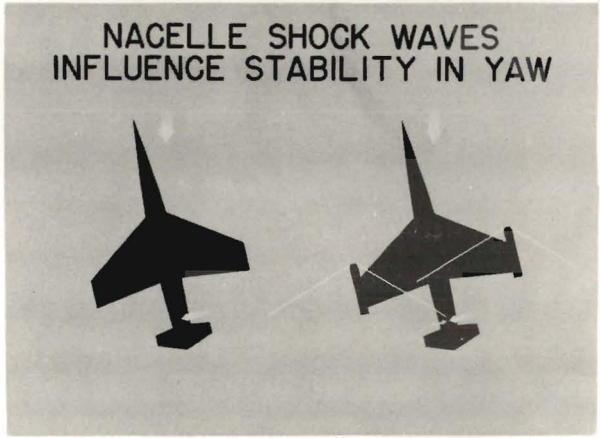
NACELLE SHOCK WAVES
INFLUENCE STABILITY IN YAW

DYNAMIC STABILITY

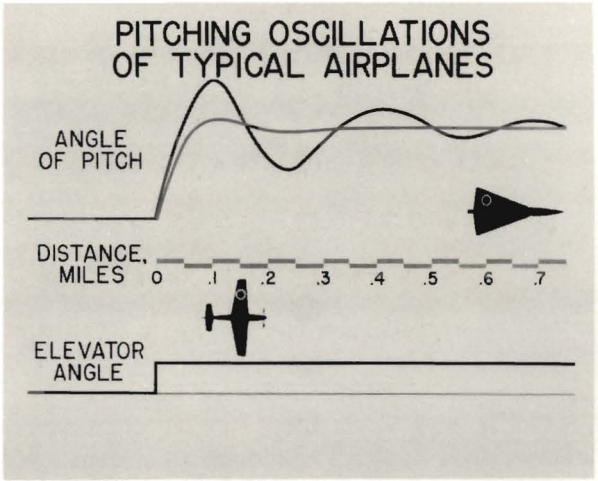

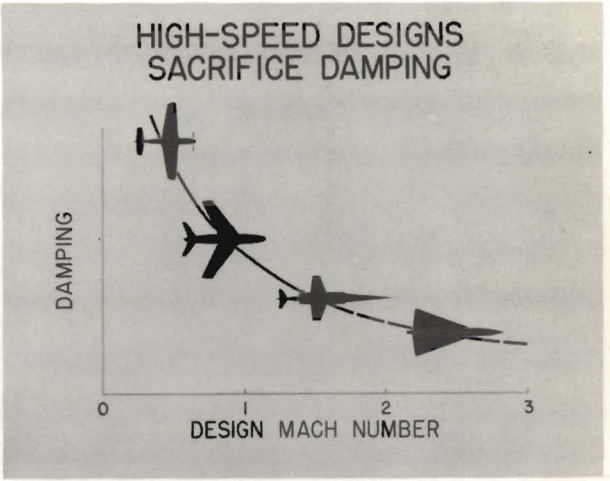

ANALYSIS OF AIRPLANE BEHAVIOR

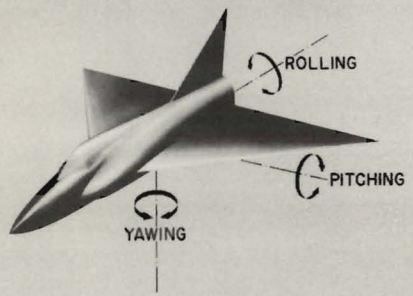

TECHNIQUES FOR STABILITY RESEARCH

1. OSCILLATION TESTS IN WIND TUNNELS
2. STEADY ROLLING TESTS IN WIND TUNNELS
3. SPECIAL WIND TUNNELS WITH CURVED FLOW
4. FREE-FLIGHT TEST RANGES
5. ROCKET-PROPELLED MODELS
6. PILOTED AIRPLANES

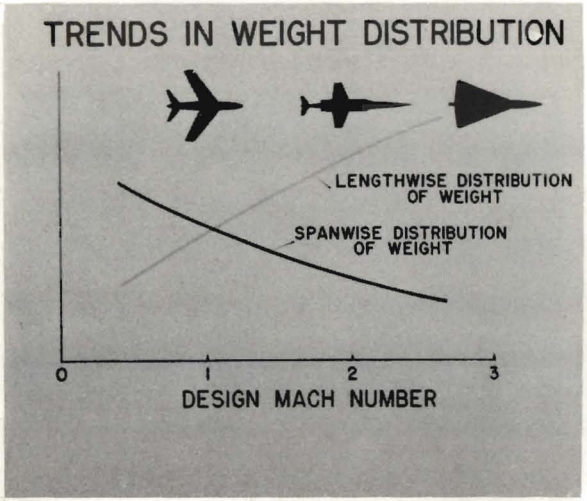
TRENDS IN WEIGHT DISTRIBUTION
LENGTHWISE DISTRIBUTION OF WEIGHT
SPANWISE DISTRIBUTION OF WEIGHT
0
1
2
3
DESIGN MACH NUMBER

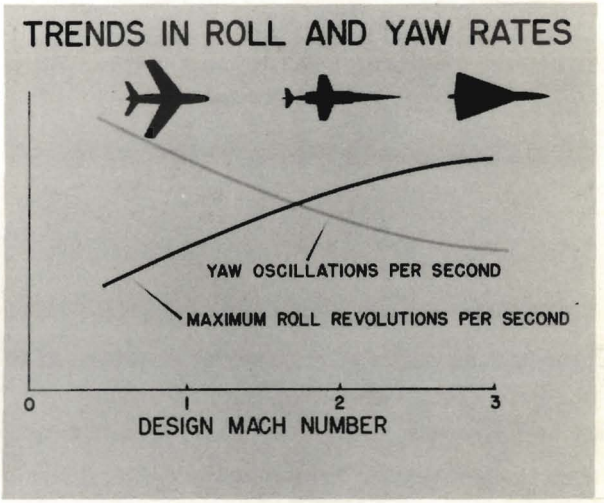
TRENDS IN ROLL AND YAW RATES
YAW OSCILLATIONS PER SECOND
MAXIMUM ROLL REVOLUTIONS PER SECOND
0
1
2
3
DESIGN MACH NUMBER

SIMULATORS AS AN AID TO FLIGHT RESEARCH

AIRPLANE MOTION SIMULATED

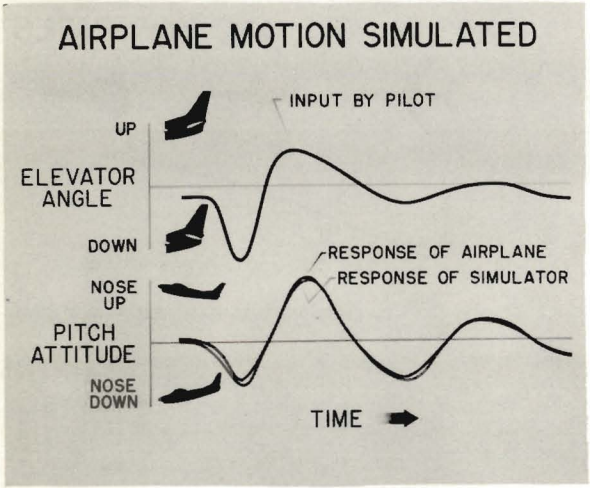

EQUATIONS FOR AIRPLANE PITCHING MOTIONS

TWO GENERAL EQUATIONS OF MOTION:

$$mV(\dot{\alpha} - q) = Z_\alpha \alpha + Z_\delta \delta$$

$$I_Y \dot{q} = M_q q + M_\alpha \alpha + M_{\dot{\alpha}} \dot{\alpha} + M_\delta \delta$$

SOLUTION FOR PITCH ATTITUDE DUE TO ELEVATOR MOTION:

$$\frac{\text{CHANGE IN PITCH ATTITUDE}}{\text{CHANGE IN ELEV. ANGLE}} = \left\{ \frac{T_\theta k - K_\theta b}{k^2} + \frac{K_\theta}{k} t + e^{\frac{kt}{2b}} \left[\frac{\left(\frac{T_\theta b^2 \omega}{4} - T_\theta \omega + K_\theta b \omega\right) \cos \omega t}{\frac{b^4}{16} + \frac{b^2 \omega^2}{2}} + \frac{\left(\frac{T_\theta b \omega^2}{2} - K_\theta \omega^2 - \frac{T_\theta k^2}{8} + \frac{K_\theta b^2}{4}\right) \sin \omega t}{\frac{b^4}{16} + \frac{b^2 \omega^2}{2}} \right] \right\}$$

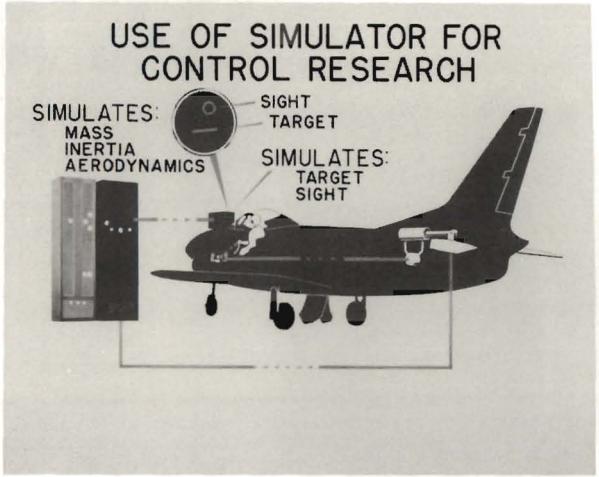
USE OF SIMULATOR FOR
CONTROL RESEARCH
SIMULATES:
MASS
INERTIA
AERODYNAMICS
SIGHT
TARGET
SIMULATES:
TARGET
SIGHT

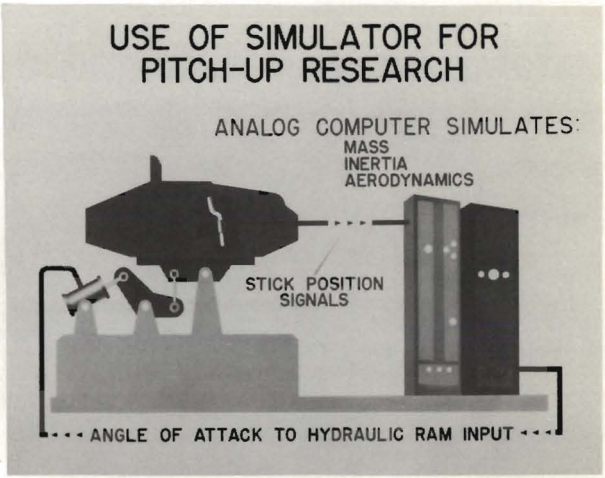
USE OF SIMULATOR FOR
PITCH-UP RESEARCH
ANALOG COMPUTER SIMULATES:
MASS
INERTIA
AERODYNAMICS
STICK POSITION
SIGNALS
ANGLE OF ATTACK TO HYDRAULIC RAM INPUT

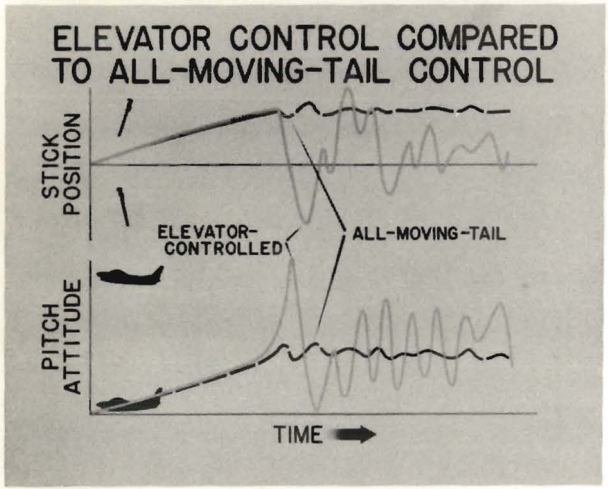
ELEVATOR CONTROL COMPARED
TO ALL-MOVING-TAIL CONTROL
STICK POSITION
ELEVATOR-CONTROLLED
ALL-MOVING-TAIL
PITCH ATTITUDE
TIME

AIRPLANE FLEXIBILITY

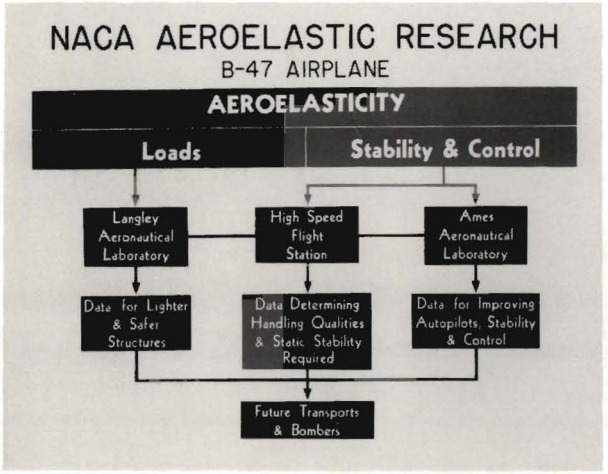

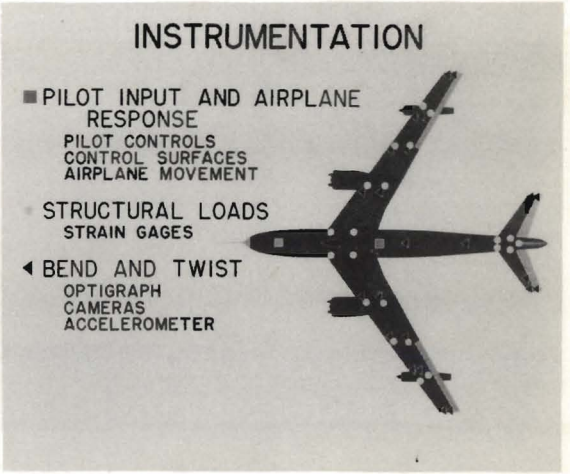

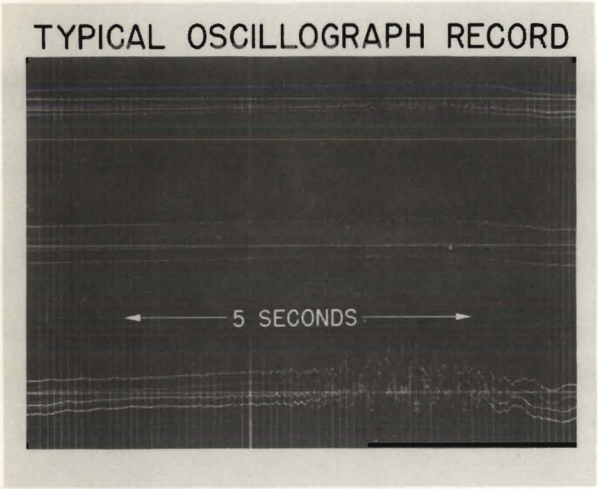
TYPICAL OSCILLOGRAPH RECORD
5 SECONDS

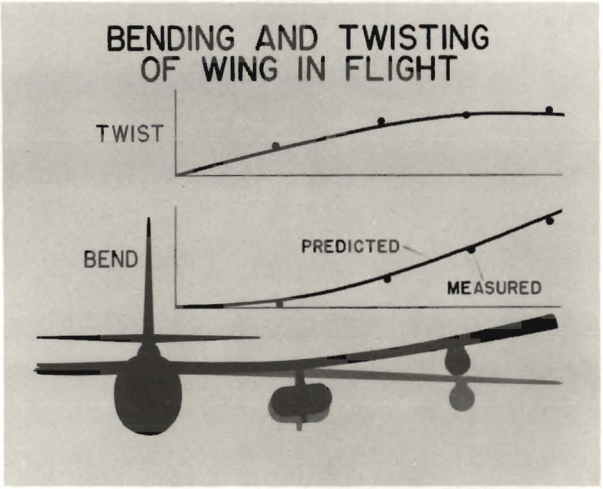
BENDING AND TWISTING
OF WING IN FLIGHT
TWIST
BEND
PREDICTED
MEASURED

TRANSONIC RESEARCH

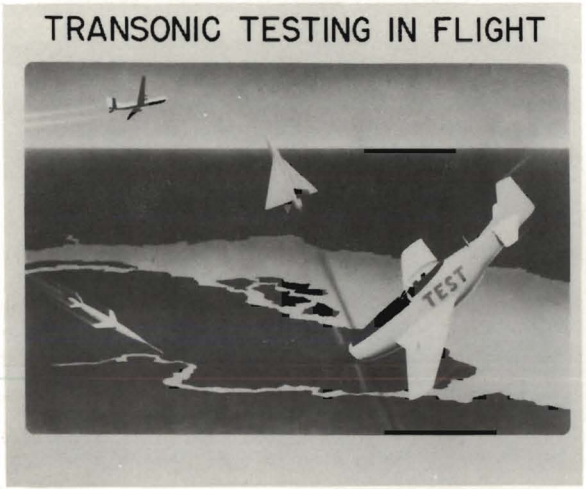

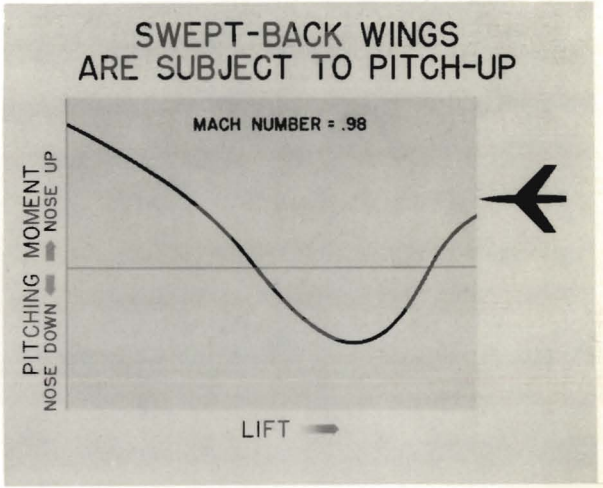

MODIFICATION OF SWEPT WINGS ALLEVIATES PITCH-UP

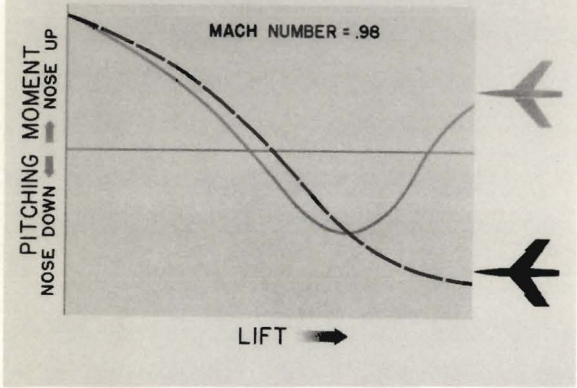

14-FOOT TRANSONIC WIND TUNNEL

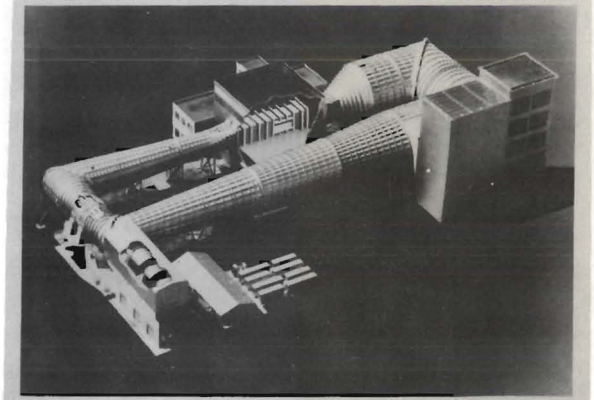

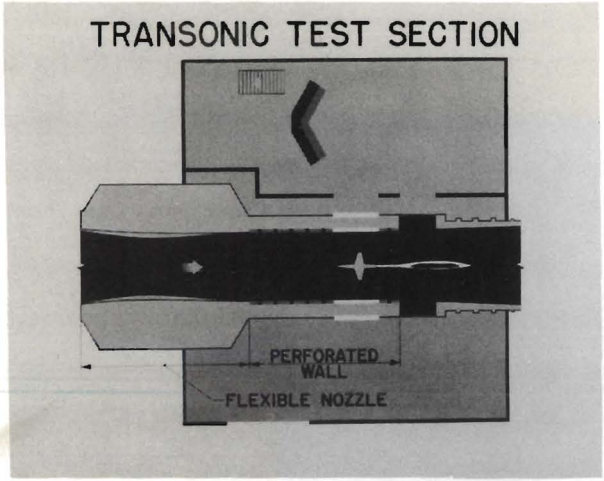
TRANSONIC TEST SECTION
PERFORATED WALL
FLEXIBLE NOZZLE

HYPERSONIC RESEARCH

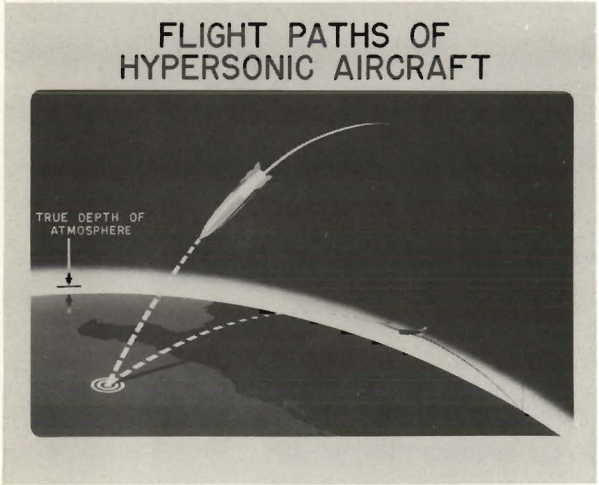

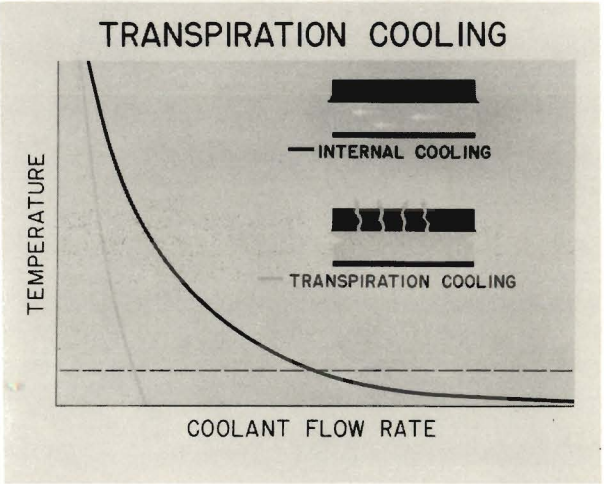

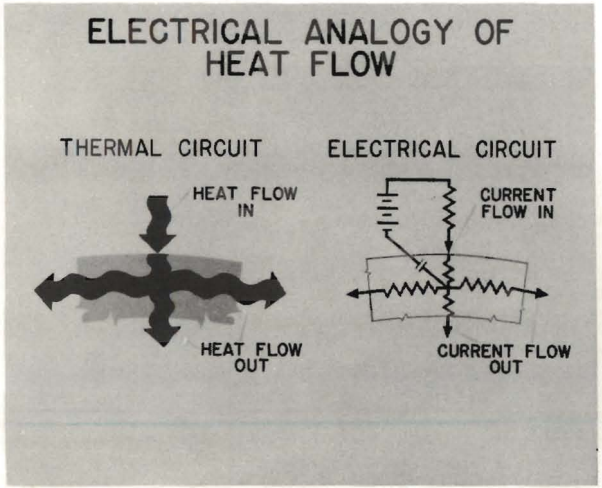
ELECTRICAL ANALOGY OF HEAT FLOW
THERMAL CIRCUIT
ELECTRICAL CIRCUIT
HEAT FLOW IN
HEAT FLOW OUT
CURRENT FLOW IN
CURRENT FLOW OUT

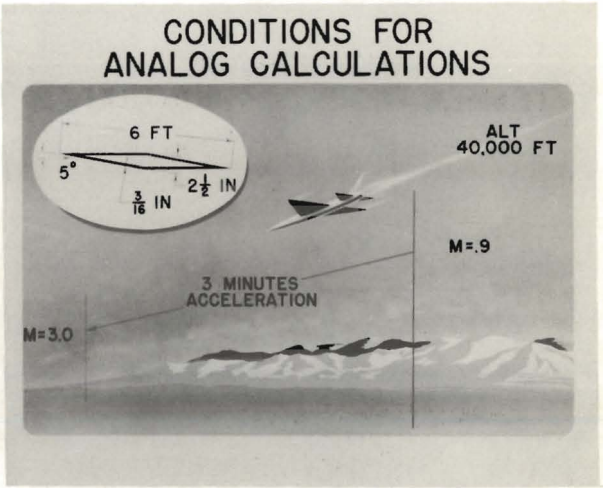
CONDITIONS FOR ANALOG CALCULATIONS
6 FT
5°
3/16 IN
2 1/2 IN
ALT 40,000 FT
M=.9
3 MINUTES ACCELERATION
M=3.0

WING SURFACE TEMPERATURE DISTRIBUTIONS

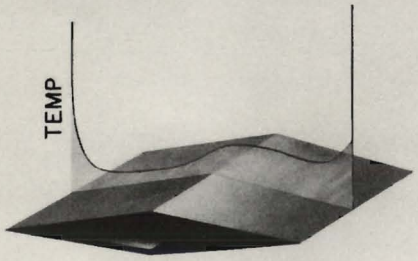

RESEARCH ON TAKE-OFF AND LANDING

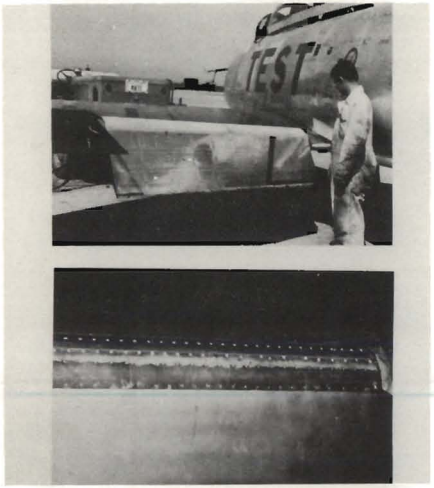

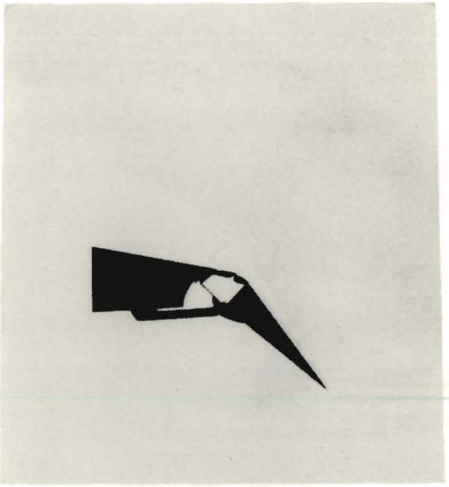

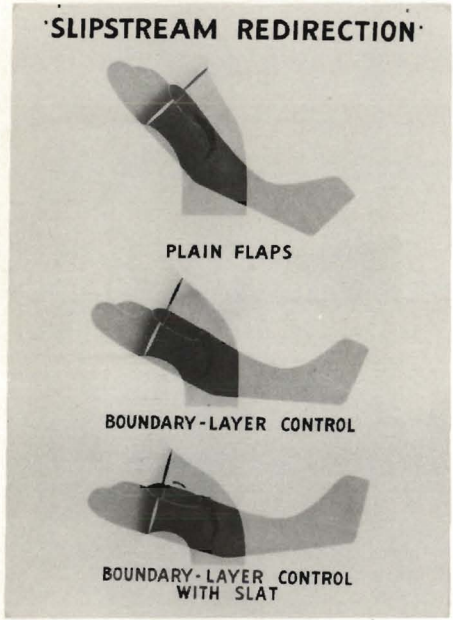
SLIPSTREAM REDIRECTION
PLAIN FLAPS
BOUNDARY-LAYER CONTROL
BOUNDARY-LAYER CONTROL WITH SLAT

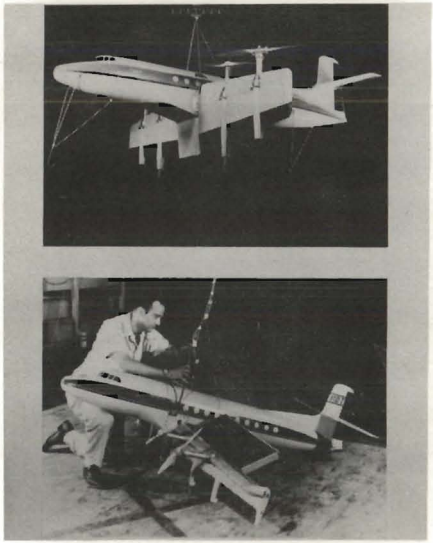

UNITARY PLAN WIND TUNNELS

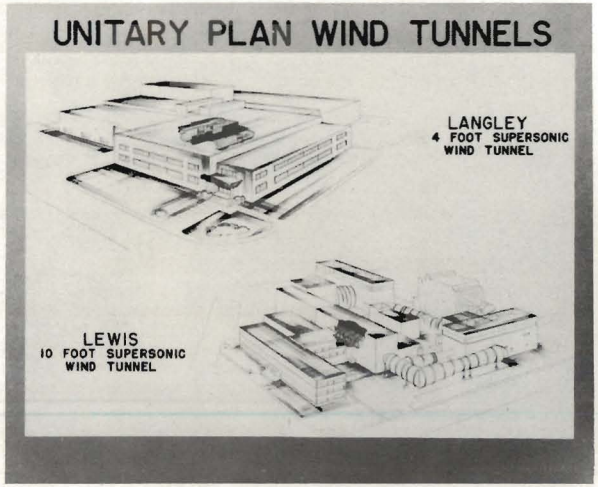

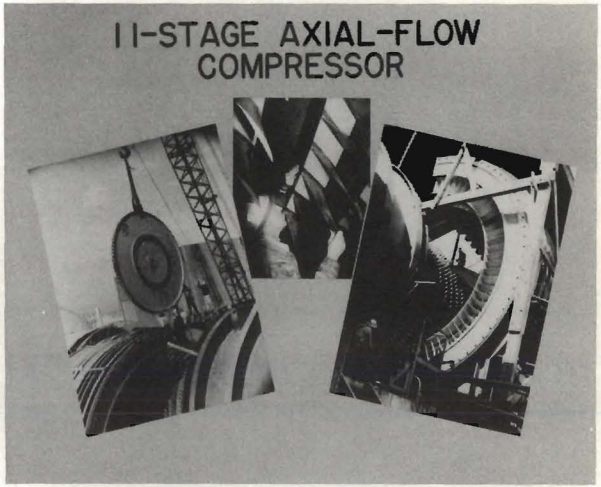

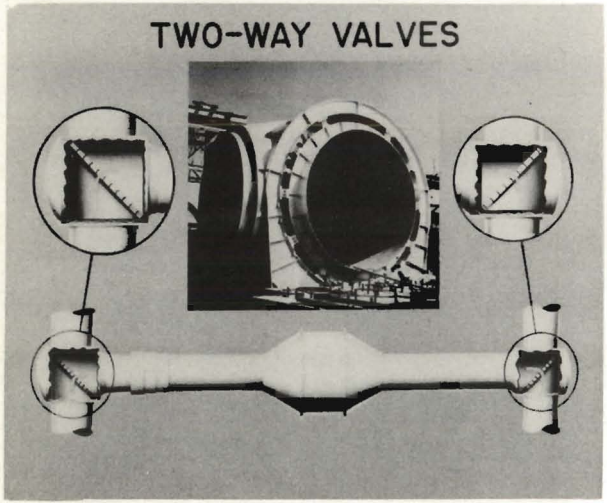
TWO-WAY VALVES

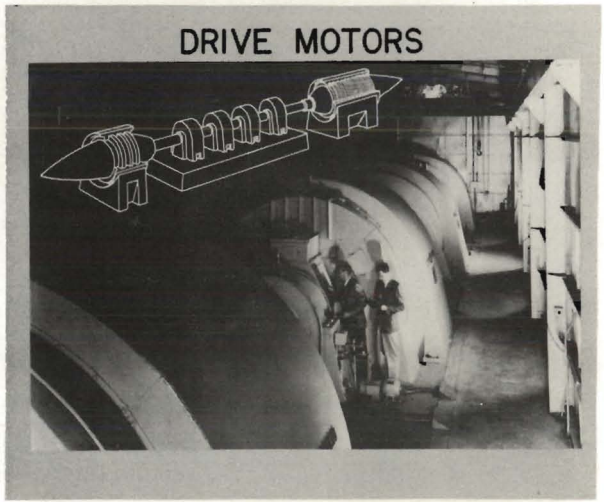
DRIVE MOTORS

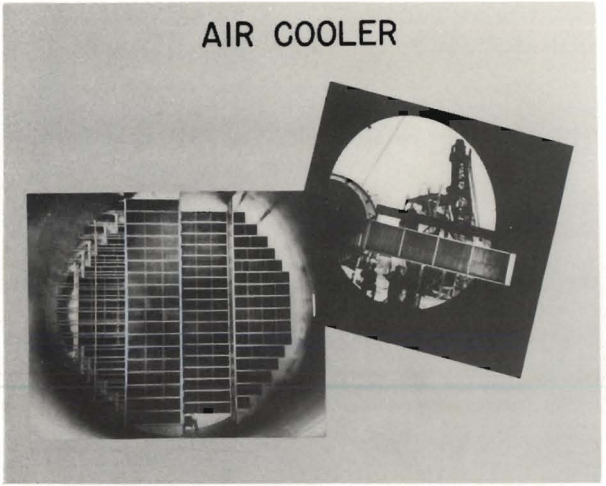
AIR COOLER

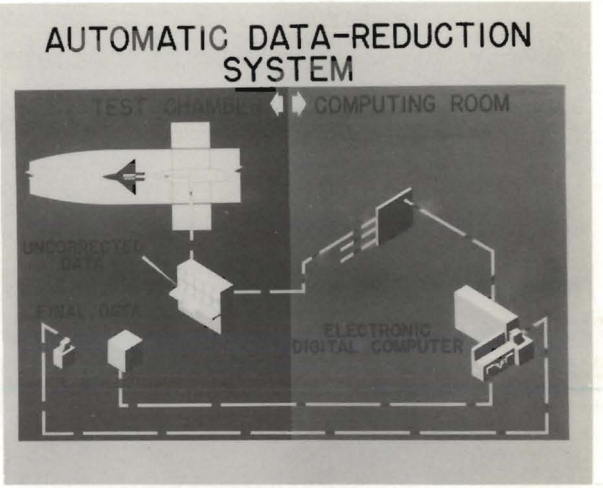
AUTOMATIC DATA-REDUCTION SYSTEM
TEST CHAMBER
COMPUTING ROOM
UNCORRECTED DATA
FINAL DATA
ELECTRONIC DIGITAL COMPUTER

JET AIRCRAFT CRASH-FIRE RESEARCH

TURBOJET CUT AWAY

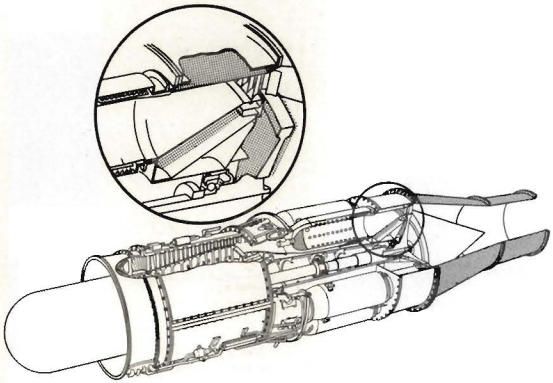

CRASH IMPACT SURVIVAL

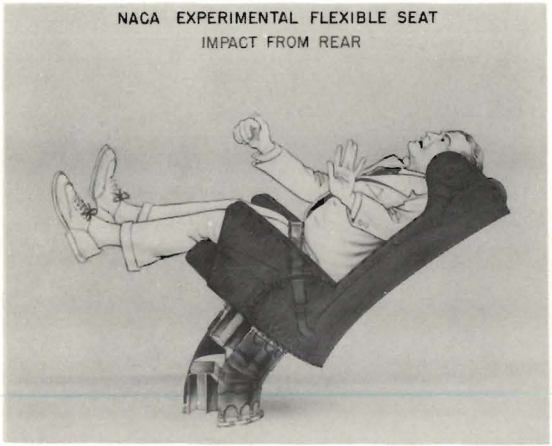

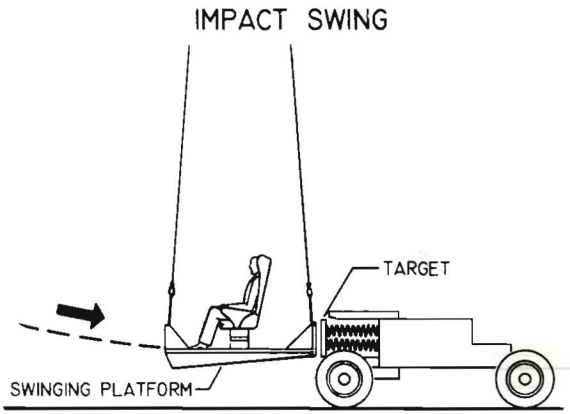

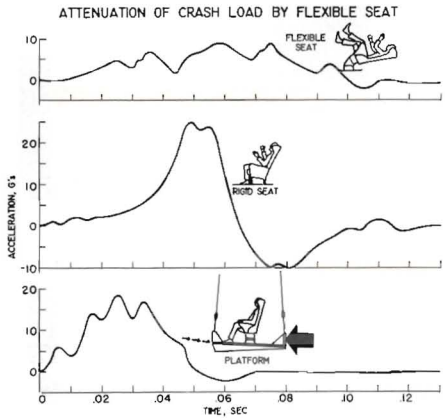
ATTENUATION OF CRASH LOAD BY FLEXIBLE SEAT
FLEXIBLE SEAT
RIGID SEAT
PLATFORM
ACCELERATION, G's
TIME, SEC

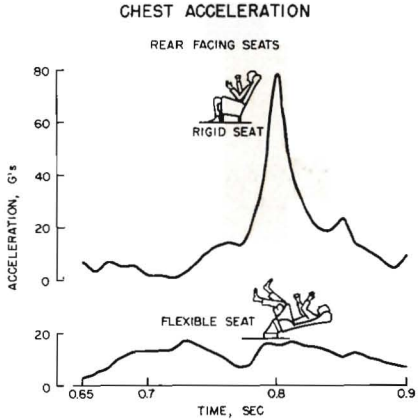
CHEST ACCELERATION
REAR FACING SEATS
RIGID SEAT
FLEXIBLE SEAT
ACCELERATION, G's
TIME, SEC

NOTES:

NOTES:

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

Jerome C. Hunsaker, Sc. D., Chairman

Detlev W. Bronk, Ph. D., Vice Chairman
Joseph P. Adams, LL. D.
Allen V. Astin, Ph. D.
Preston R. Bassett, M. A.
Leonard Carmichael, Ph. D.
Frederick C. Crawford, Sc. D.
Ralph S. Damon, D. Eng.
James H. Doolittle, Sc. D.
Rear Adm. Lloyd Harrison, USN
Vice Adm. Thomas S. Combs, USN
Lt. Gen. Donald L. Putt, USAF
Donald A. Quarles, D. Eng.
Arthur E. Raymond, Sc. D.
Francis W. Reichelderfer, Sc. D.
Louis S. Rothschild, Ph. B.
Gen. Nathan F. Twining, USAF

Hugh L. Dryden, Ph. D.
Director

John W. Crowley, Jr., B. S.
Associate Director for Research

John F. Victory, LL. D.
Executive Secretary

E. H. Chamberlin
Executive Officer

Ames Aeronautical Laboratory, Moffett Field, California
Smith J. DeFrance, D. Eng., Director

Langley Aeronautical Laboratory
Langley Field, Virginia
H. J. E. Reid, D. Eng., Director

Lewis Flight Propulsion Laboratory
21000 Brookpark Road, Cleveland 11, Ohio
Edward R. Sharp, Sc. D., Director

High-Speed Flight Station
Edwards, California
Walter C. Williams, B. S., Chief

NACA